


Res'd PCT/PTO 14 SEP 2005  
PCT/GB 2003 / 0 0 5 4 9 5



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the application is now proceeding in the name as identified herein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

Signed *[Signature]*

Dated 20 February 2004



INVESTOR IN PEOPLE

GB 0229252.2

By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of:

INBULK TECHNOLOGIES LIMITED,  
1Redwood Crescent,  
Peel Park,  
EAST KILBRIDE,  
G74 5PA,  
United Kingdom

Incorporated in the United Kingdom,

[ADP No. 08811622001]

16. DEC. 2002 17:02

HARRISON GODDARD FOOT


Patents Form 1/77

Patents Act 1977  
(Rule 16)The  
Patent  
Office

NO. 077

P. 3/17

1/77

**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

MRH/P101419GB

2. Patent application number

*(The Patent Office will fill in this part)*

0229252.2

16 DEC 2002

16DEC02 E771264-1 D02973

P01/7700 0.00-0229252.2

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*Clyde Blowers Limited  
1 Redwood Crescent  
Peel Park  
EAST KILBRIDE  
G74 5PAPatents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

UK

835 704 0001  
APPLICATION FILED 20/2/04

4. Title of the invention

Transport and Pneumatic Conveying of Bulk Powders

5. Name of your agent *(if you have one)*

Harrison Goddard Foote

*"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)*Belgrave Hall  
Belgrave Street  
Leeds  
LS2 8DDPatents ADP number *(if you know it)*

14571001

76313 10002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number  
*(if you know it)*Date of filing  
*(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if)*

a) any applicant named in part 3 is not an inventor, or Yes

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

0055514 16-Dec-02 04:07

## Patents Form 1/77

- Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 13

Description 7

Claim(s)

Abstract

Drawing(s) 6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

1 fax cover sheet, 1 fee sheet

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

Harrison Goddard Pat 16 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Michael Harrison

0113 233 0100

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

## TRANSPORT AND PNEUMATIC CONVEYING OF BULK POWDERS

### Field of the Invention

- 5 This invention relates to the transport and pneumatic conveying of bulk materials, in particular to containers therefor and methods thereof. More particularly the invention is concerned with the transport and unloading of bulk powders in standard ISO container-dimensioned tanks.

### 10 Background to the Invention

- Currently, large quantities of liquids are transported in horizontal cylindrical tanks which are located within a frame which has the dimensions of standard ISO containers, so that, as a result, they can be transported and handled by standard container handling and transport systems. They may be transported by rail, road and  
15 sea and emptied by connecting a hose to a discharge pipe located at the bottom of the tank.

- Bulk powders can also be transported in this type of tank, but, being bulk powders, they cannot be emptied in the same way. One method of emptying involves tipping  
20 the tank to an approximately 45° angle and then pressurising the tank to discharge the contents from one end through a hose. An alternative method involves a fluidising system covering a large proportion of the internal area of the base of the tank. Along the length of the tank there are arranged a plurality of discharge points through which the material is pneumatically conveyed after pressurisation of the tank. With such an  
25 arrangement the tank can be emptied while it remains horizontal.

- An alternative method of fluidising the tank involves the provision of a plurality of conical outlets in a line along the length of the bottom half of the tank. The material can flow into these outlets by gravity and thence be pneumatically conveyed to  
30 storage. Flow is by gravity towards the outlets with only the bottom of the conical section being aerated. The provision of the conical outlets reduces the total storage

space. Furthermore the overall shape, including the conical outlets is not ideal for a pressure vessel.

The use of an internal fluidising membrane, which covers a large proportion of the base area of the tank, enables the maximum bulk powder volume to be transported. Due to the conventional methods of internal membrane support structure which have been employed, this method results in a considerable increase in the weight of the overall container. The amount of bulk material which can be transported is limited by the maximum transportable weight of the container together with its contents, typically between 30 and 34 tonnes. It is therefore desirable to utilise a fluidisation system which leaves maximum internal volume for bulk material and also adds as little as possible to the weight of the container.

To enable the fluidised material to flow by gravity towards the discharge pipes, the fluidising membrane is sloped at an angle to the horizontal which is typically between 5 and 10°. Previous methods for supporting the fluidising membrane include the use of internal frames onto which flat panels of fluidising membrane are bolted. These frames cause a reduction in volume due to their height inside the tank. They are usually constructed in flat panel format which creates a number of areas on the membrane which do not fluidise well at the junctions between the panels when fixing bolts are present. This results in a number of places where the material does not flow, thereby resulting in relatively large amounts of residual materials in the tank which cannot be discharged. Furthermore, the flat panels require significant reinforcement to take the weight of bulk powder such as cement over such a large flat area. This reinforcement is expensive and adds weight to the tank which affects the economics of its use due to the overall transport weight restrictions for such containers.

#### Statements of the Invention

According to the present invention there is provided an elongate container for the transport of bulk powders, the container being provided with an internal fluidising

membrane extending over at least a portion of the base of the container, the membrane being curved in a direction transverse to the length of the container, the extent of curvature changing along the length of the membrane.

- 5 The changing curvature along the length of the membrane creates a slope for gravity flow of the fluidised powder towards a discharge point.

Preferably the curvature of the membrane increases in a direction from its lowest point to its highest point.

10

Preferably a plurality of membranes are arranged along the base of the container in lengthwise juxtaposition. More preferably adjacent membranes slope in opposite directions along the length of the container. Preferably the container, when arranged for unloading of its bulk powder content, is provided with a discharge pipe, one end of which is located adjacent the lowest point of the or each membrane. More preferably the discharge pipe is connected to means, located outside the container for pneumatically conveying powder from the container to a position exterior thereof.

15

Preferably means are provided, when the container is to be unloaded, to cause powder located above the membrane to be fluidised. More preferably the fluidising means include means for delivering gas under pressure to the space below the sloping membrane.

20

Preferably the membrane is supported on a foraminous curved plate. The membrane is preferably made from a porous material permitting gas to flow through it but being impervious to the bulk powder material. The membrane may be made of, for instance, woven fabric, porous metal sheet or porous plastic sheet.

25

The elongate container of the present invention may be cylindrical, which is a preferred shape for a pressure vessel.

30

### Brief description of the Drawings

The present invention will now be further described by way of example and by reference to the accompanying drawings, in which:

- 5           Figure 1 shows the external view of a standard 30ft. ISO container-sized bulk powder tank;
- Figure 2 is a plan view of the tank of Figure 1;
- Figure 3 is an end view of the tank of Figure 1;
- Figure 4 shows the internal arrangement of the tank of Figure 1;
- 10          Figure 5 shows a cross section of the tank at one of the discharge pipe positions;
- Figure 6 shows a cross-section of the tank at the apex of the joint between two adjacent membrane supports;
- Figure 7 is a schematic arrangement of the tank of Figure 1 with compressed
- 15          air pipework and powder conveying pipework;
- Figure 8 is a schematic arrangement of the tank, located on a conveying vehicle and connected to a compressed air supply and reception silo;
- and
- Figure 9 is a section through one of the membrane supports of the tank of
- 20          Figure 1 and includes a more detailed section thereof.

### Description of the Invention

- Referring to the accompanying drawings, Figures 1 to 3 show a standard 30ft. ISO container-sized bulk powder tank. In other embodiments, the tank may be of a
- 25   different size, for instance, 10ft. or 40ft. Shown in these figures are the tank support frame 1, inlets 3 for loading bulk powder into the tank and pipework 5 for fluidising the bulk material and for discharging bulk material to position exterior of the tank.

- Referring to Figure 4 of the accompanying drawings, tank 7 is a cylindrical shell
- 30   having dished ends 9, a shape which is suitable for a pressure vessel. Arranged along the base of the tank are a series of membranes 11 each of which is arranged on a support (to be described below). Each membrane 11 comprises two sloping sections



11a and 11b. Section 11a slopes downwardly along a part of the length of the tank from its highest point adjacent one end of the tank to its lowest point at the very base of the tank. Section 11b slopes in the opposite direction from the common lowest point towards a highest point where it is connected to a divider plate 13. Extending from support 13 in a direction away from membrane 11 are two further membranes 15 and 17. As seen in Figure 4, the result is effectively a continuous membrane extending from adjacent one end of tank 7 to adjacent the other end. Each support 14 creates a plenum chamber 19 beneath the membrane 17 so that fluidising air may be fed thereto and thence through the membrane as will be described below.

Referring to Figure 9 of the accompanying drawings, the membrane 21 is made from woven fabric and is provided with a membrane top sheet 23 which is made from perforated metal sheet and prevents the fabric from "lifting" when air is flowing through it into the bulk powder. In the case where the membrane is made of another material, for instance porous metal sheet or porous plastic sheet, the top sheet 23 may be omitted.

The membrane 21, and accompanying top sheet 19, are located on a membrane support (25) which is constructed from a curved, foraminous plate having many punched holes 27 therethrough. The whole assembly is bolted together around its edges with bolts 29. The detailed cross-section in Figure 9 shows two membrane assemblies 31 and 33 being welded together and each to a support 13.

Referring to Figures 5 and 6 of the accompanying drawings, a membrane assembly 31 has a constant width  $W$  as measured horizontally across the tank 7. As a result the membrane assembly has a smoothly changing radius along its length. The radius changes from value  $R1$  at the point where the membrane support is fixed directly to the tank wall at its lowest point and  $R2$  of the apex between two adjacent membrane assemblies. This changing radius along the length of the membrane provides the required slope for gravity flow of the fluidised powder towards a discharge point.

The membrane assembly is connected to the sides of the tank by, for example, welding.

5 The smooth, curved shape of the membrane assemblies enables heavy loads to be carried by a relatively lightweight support. The support requires no additional strengthening, support ribs or frames, since the metal support is in "tension", supported only at its edges. At each end of the tank 7 there is a sloping transition plate 35 (Figure 4) which extends between the end of the membrane assembly 11, 17 and a dished end 9. Support plate 35 is sloped at an angle such that material will  
10 slide by gravity onto the membrane 11 or 17. Plate 35 is typically arranged at an angle of about 45° from the horizontal.

At the lowest position of each membrane assembly, a discharge pipe 37 opens at a position just above the membranes. Discharge pipe 37 extends upwardly and towards  
15 the wall of the container through which it passes as shown in Figure 5. As best seen in Figure 7 discharge pipe 37 forms part of a discharge assembly which includes three such pipes 37 connected to a common pipe 39, valves 41 being provided in each discharge pipe 37. As illustrated in Figure 8, common pipe 39 can, for discharging purposes, be connected to a hose 41 which leads to a pipe 43 extending  
20 to the top of a silo 45 to which it is connected by inlet 47. Compressed air from blower 55 applies pressure to the tank 51. This pressure pushes the bulk powder up discharge pipes 37 so that it can be conveyed by pipe 41 to the silo 45.

Air under pressure is supplied to plenum chambers 19 and to the space 49 above bulk  
25 powder 51 (see Figure 7) by a network of pipes shown in single line in Figure 7. Compressed air is supplied via a common pipe 53 having a compressed air supply or blower 55. Pipe 53 is connected to a plurality of pipes 56 each leading to a plenum chamber 19. Each such pipe 56 is provided with a valve 57. In addition pipe 59 extends from pipe 53 to space 49 and is provided with a valve 61. Valve 63 is  
30 located in pipe 65 extending between common pipe 39 and pipe 53.




The bulk powder tank 7 is filled with bulk powder by gravity through inlets 3. The tank is then moved by road, rail or sea to its destination, at which the bulk powder is to be pneumatically conveyed into the receiving silo 45.

- 5 In order to empty the tank of bulk powder the blower 55 is connected to the air supply header pipe 53 and a discharge hose 41 is connected to the discharge header pipe 39. The compressed air valves 57 and 61 are then opened to raise the pressure of the tank to approximately 1.8 bar pressure for opening the conveying outlet valves 41 in sequence to empty the tank. During emptying, valve 63 is opened to add air to
- 10 the powder in order to create the correct powder and air mixture for pneumatic conveying. When all material has been discharged, the blower 55 is stopped and the tank is allowed to return to atmospheric pressure by venting through the empty conveyor pipe 43 into the silo 45. The conveying air and venting air is passed through a filter 69 so that the air venting to atmosphere is clean.

15

P101419GB.1

20

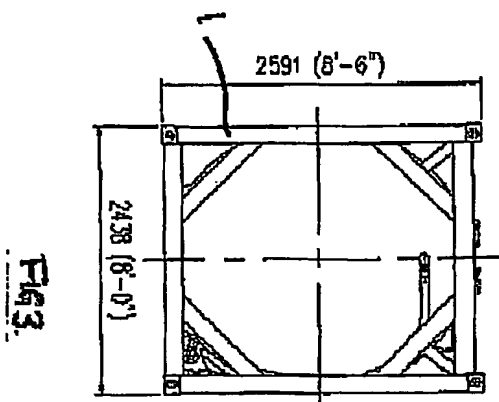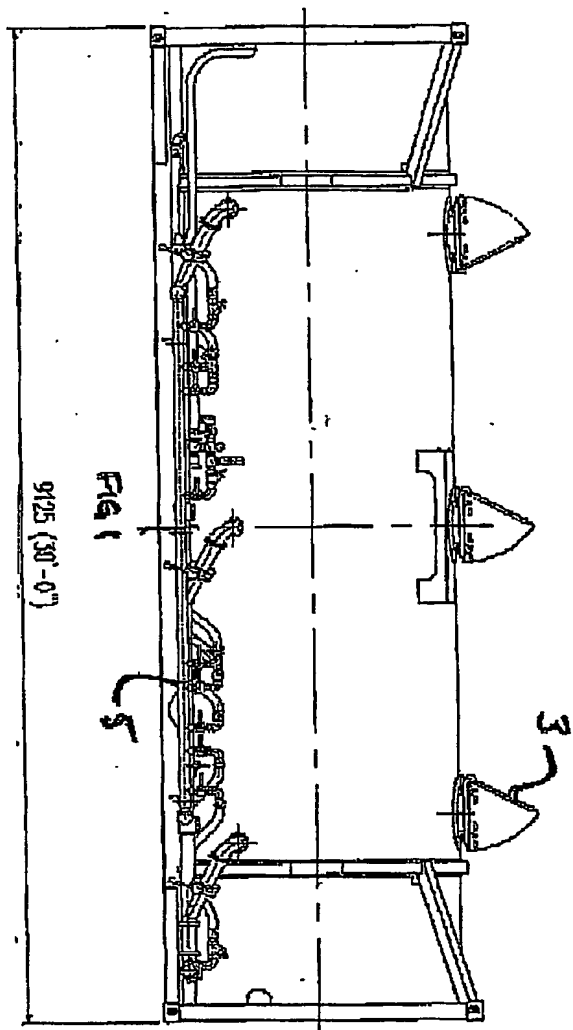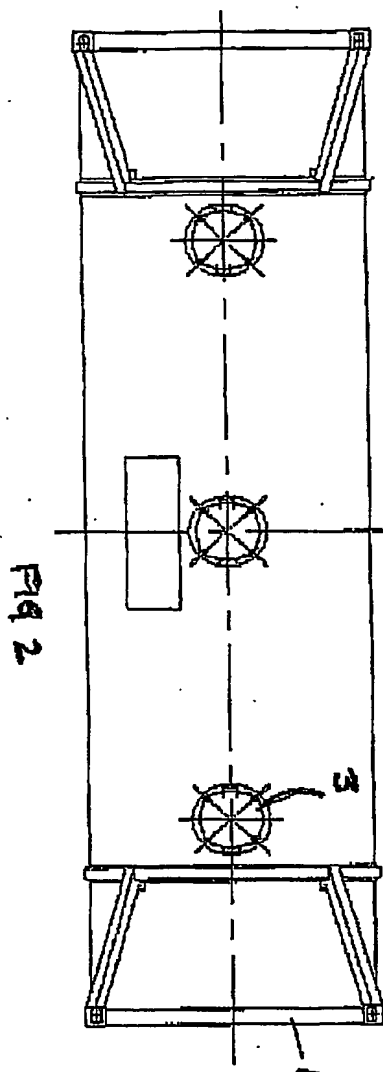

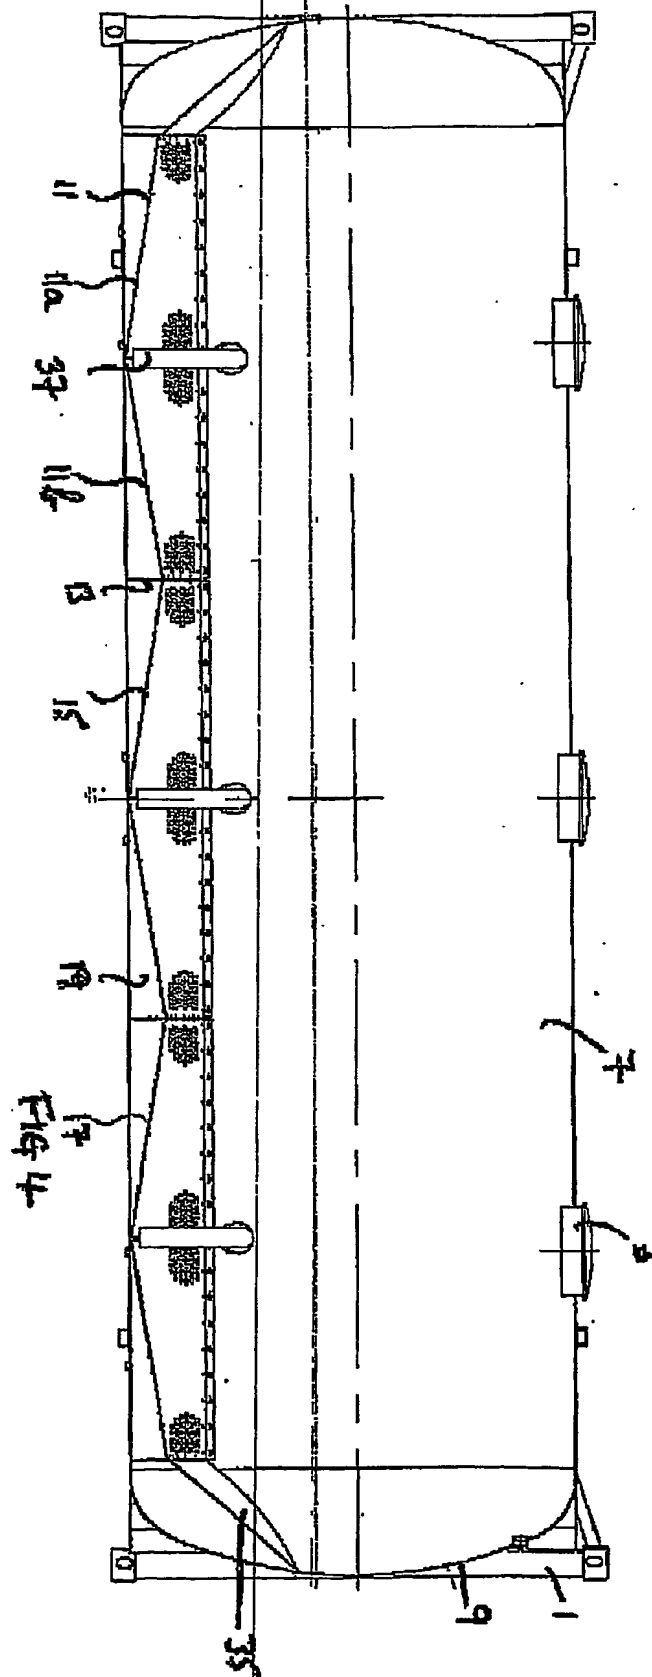


Fig 6

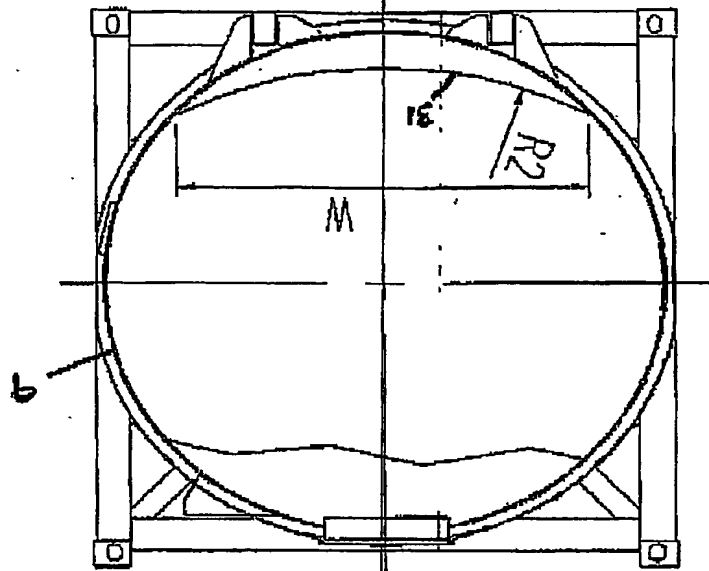
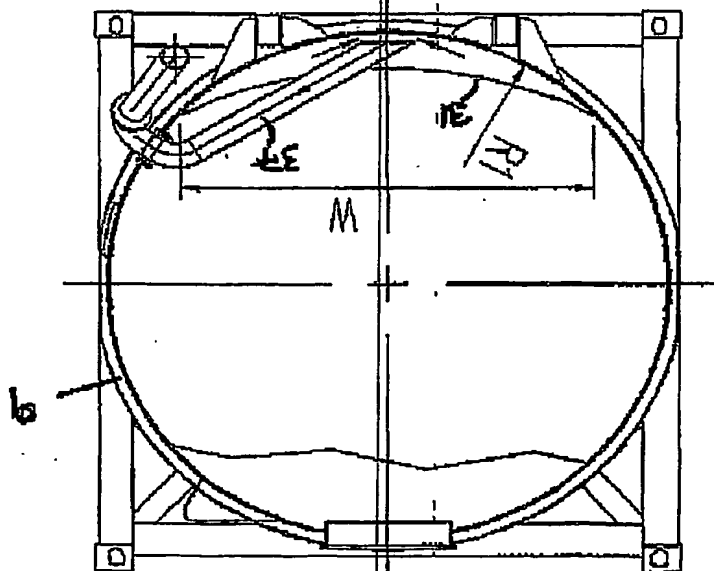


Fig 5



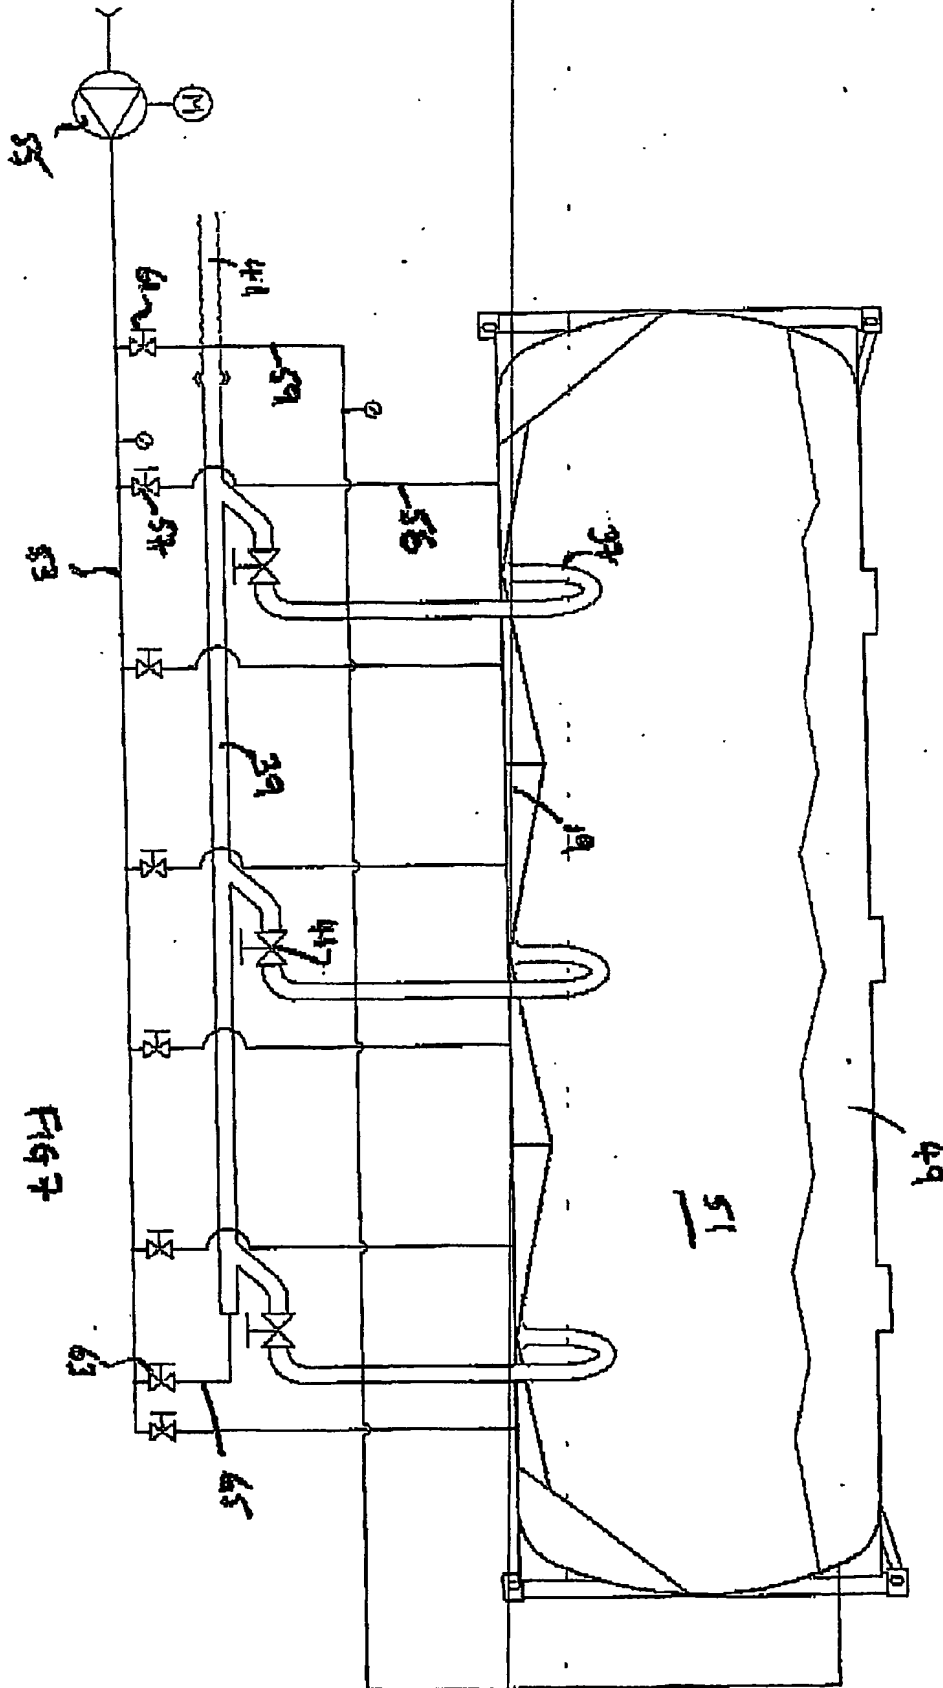
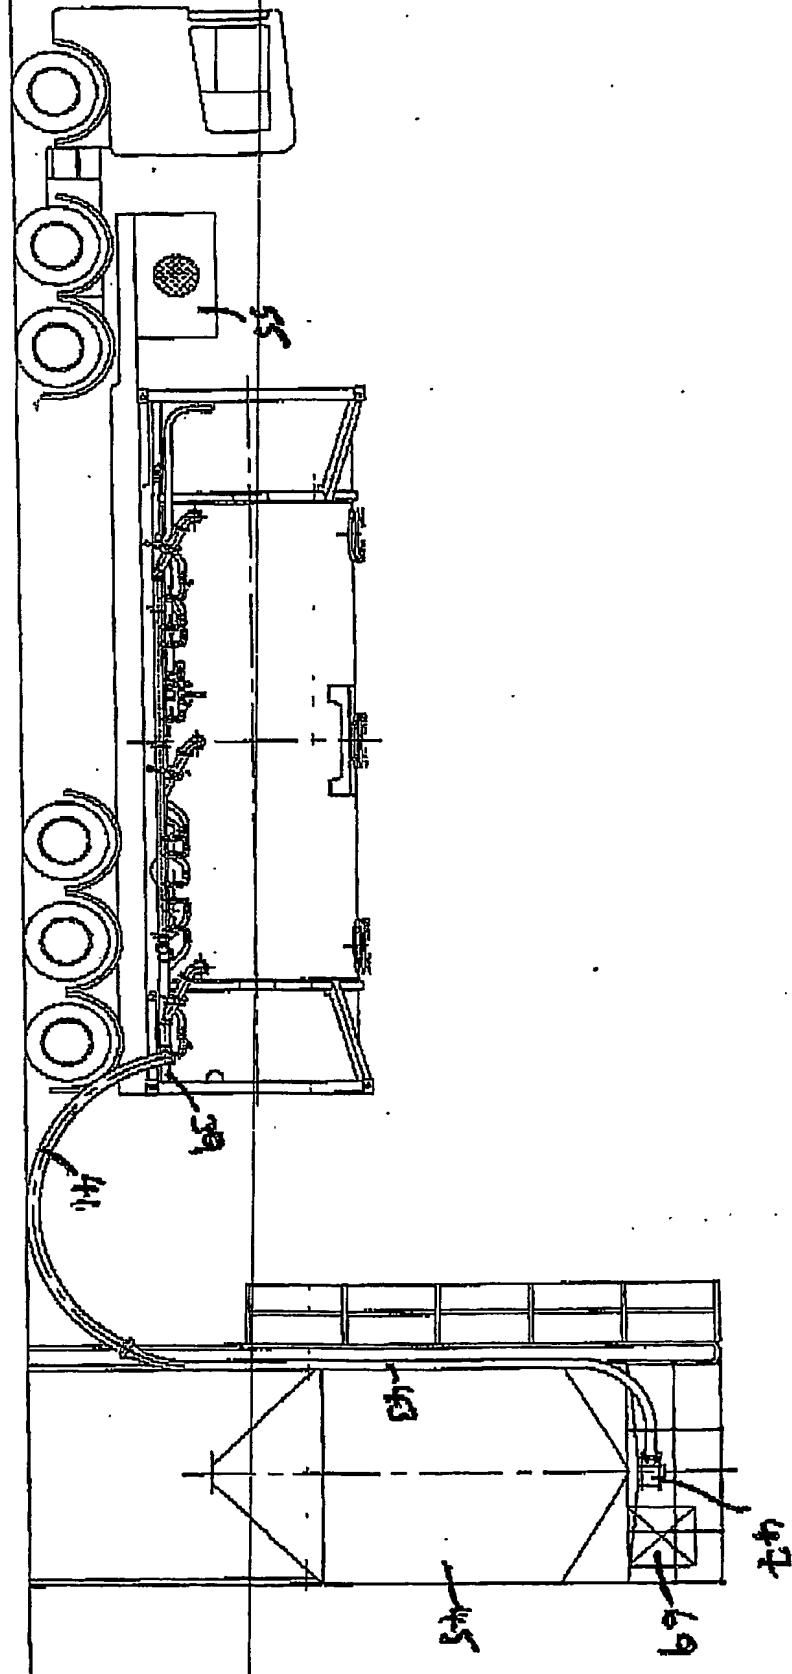


Fig 8





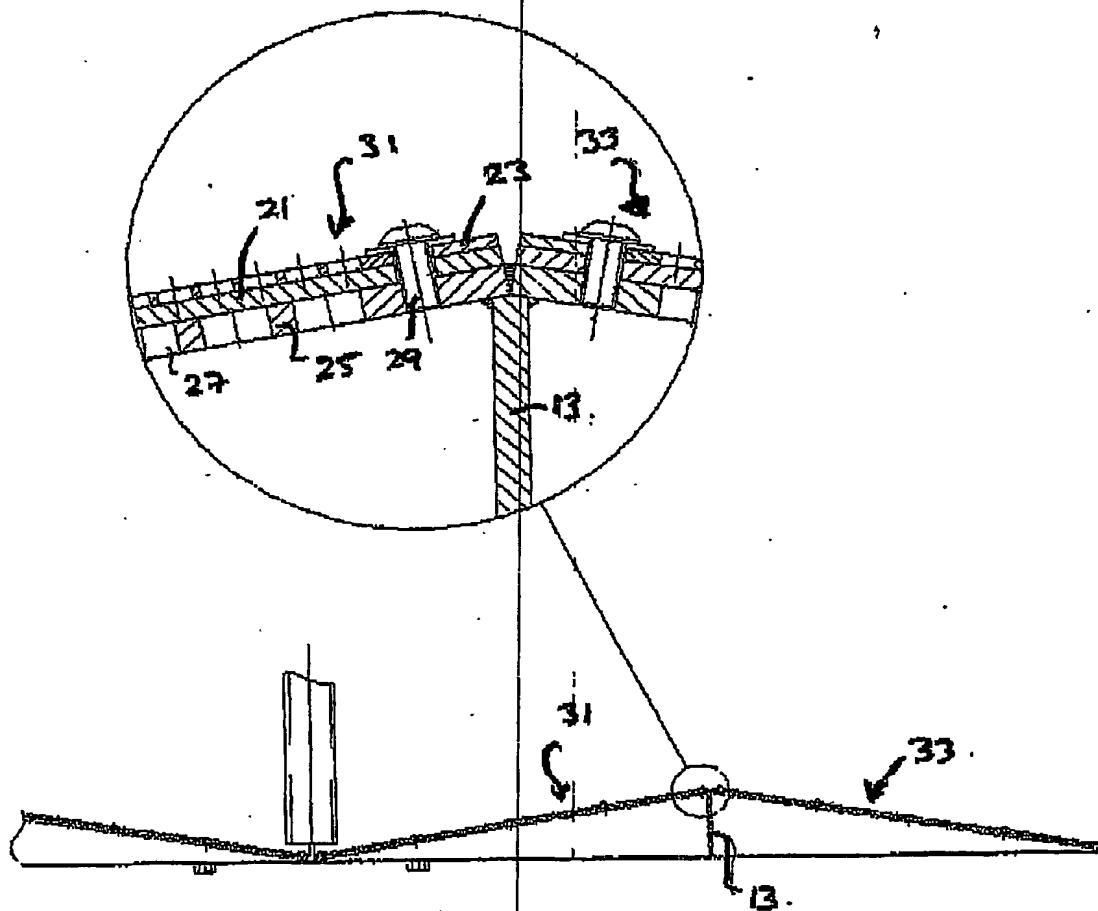


Fig 9.

PCT Application  
PCT/GB2003/005495



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**